



EPILOG LASER

16371 Table Mountain Parkway
Golden, Colorado 80403
Phone 303-215-9171 - FAX 303-277-9669
www.epiloglaser.com

Procedure Title: Replacing the X/Y Combo PCB

Machine Type: Mini18, Mini24, Helix

Intro:


This procedure details steps to replacing the X/Y Combo PCB.

Procedure:


1. Remove right side panel with Phillips screwdriver.



2. Locate the fan mounting bracket next to the X motor and remove it by unplugging the motor and fan connectors and removing the Phillip's screws.

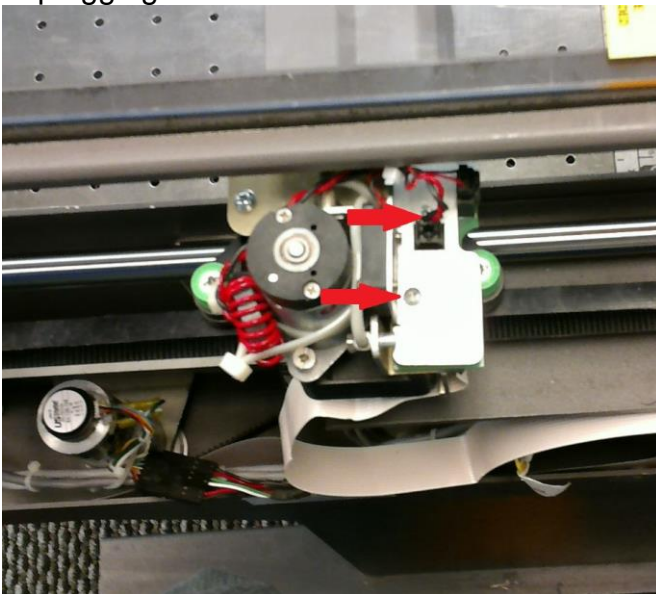

3. Remove the 2 nuts holding the PCB in place and remove it.

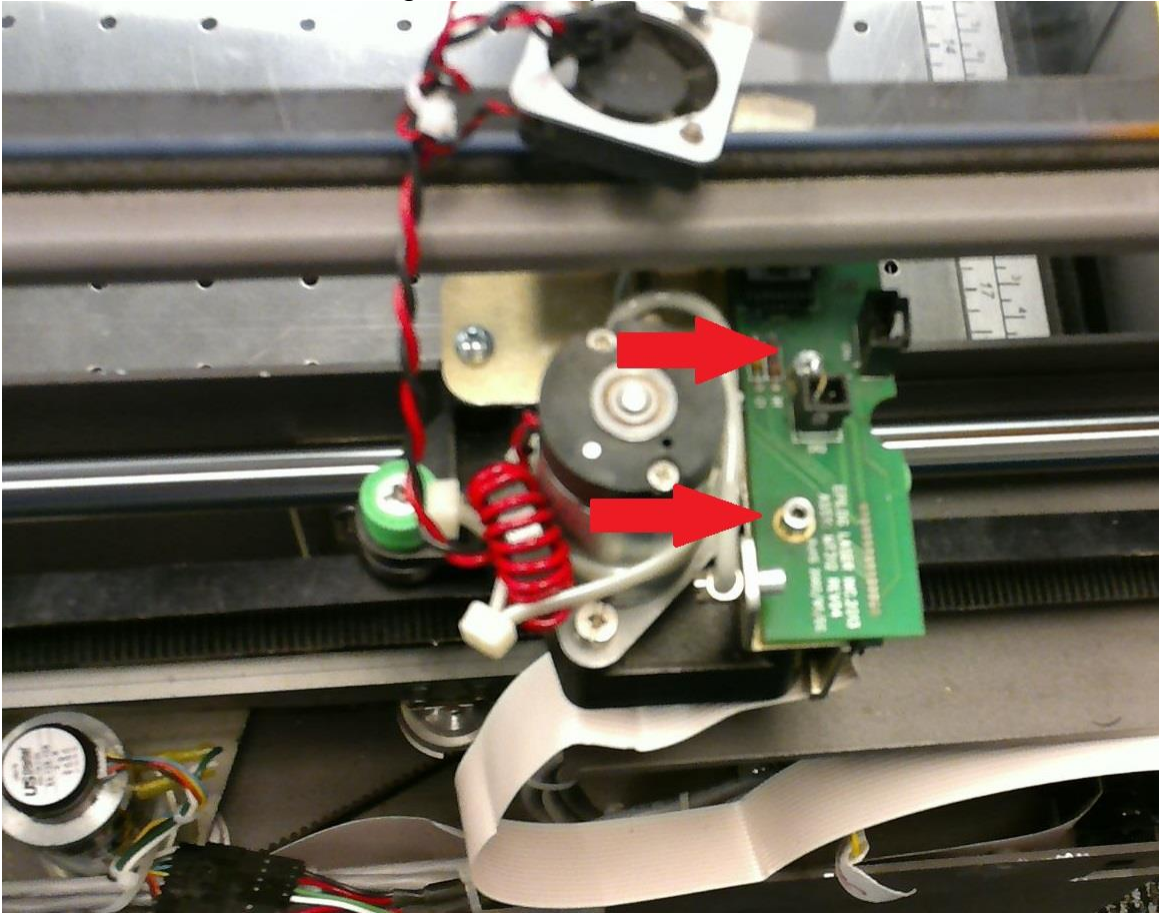

4. Reverse Steps 3-1 to install the new PCB.

If you have any questions, please contact Epilog's Technical Support
Phone 303.215.9171
Fax 303.531.7594
E-Mail tech@epiloglaser.com